

GoldLED

Park & Garden Catalog



***Goldair
Group***



PIRAEUS BANK



Contents

GoldLED-Dion COB.....	4
GoldLED-Borneo.....	5
GoldLED-Olympos.....	6
GoldLED-Limnos.....	7
GoldLED-Patra	8
GoldLED-Milos	9
Grass Lunimaires.....	10
GoldLED-BriLED IP54.....	11
GoldLED-Pigeon IP54	12
GoldLED-Pigeon IP54	Error! Bookmark not defined.
GoldLED-Fia IP54	13
Appliques and Recessed LED Lighting	14
GoldLED-Cono Applique	15
GoldLED-HatLED Applique	16
GoldLED-Isilay Applique	Error! Bookmark not defined.
GoldLED-Cubo.....	17
GoldLED-RC01 IP67 Recessed Floor Luminaires.....	18
GoldLED-RC02 Recessed MiniLED	19
GoldLED-RC03 Recessed MultiLED.....	20
WallWashers and Flood Lights	21
GoldLED-Inovaled Wallwasher IP66.....	22
GoldLED-WWR01 Recessed Wallwasher.....	23
GoldLED-IF Wallwasher IP67	26

Park and Grass Luminaires



GoldLED-Dion COB



Προτεινόμενες
Χρήσεις:



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Power LED	4500-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,Ø)
GoldLED Dion 30W	30W	3300lm	1	4500x710x168

Επιπλέον Επιλογές:


- CCT της Επιλογής του Πελάτη
- Βαφή Φωτιστικού σε χρώμα RAL

- Lenses: Metallized polymer
- Diffuser: Clear glass, BK 7

Certificates



GoldLED-Borneo



**Προτεινόμενες
Χρήσεις:**



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Power LED	4500-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,Ø)
GoldLED Borneo 64W	64W	14420lm	1	4500x980x114

Επιπλέον Επιλογές:

- CCT της Επιλογής του Πελάτη
- Βαφή Φωτιστικού σε χρώμα RAL

- Lenses: Metallized polymer
- Diffuser: Clear glass, BK 7

Certificates



GoldLED-Olympos



**Προτεινόμενες
Χρήσεις:**



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
Mid Power LED	4500-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions(a,b,c,d,Ø)
GoldLED Olympus 40W	40W	3600lm	1	4500x100x790x450x220

Επιπλέον Επιλογές:

- CCT της Επιλογής του Πελάτη απο 4000-6500K
- Βαφή Φωτιστικού σε χρώμα Ασημί ή Λευκό
- Dimmable Driver

- Lenses: Metallized polymer
- Diffuser: Clear glass, BK 7

Certificates



EN 60598-2-1



GoldLED-Limnos



**Προτεινόμενες
Χρήσεις:**



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Mid Power LED	4000-6500K	0,95	>70	Electrostatic powder coated aluminium	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions(h,Ø)
GoldLED Limnos 38W	38W	3880lm	1	4500x200x700mm
GoldLED Limnos 80W	80W	7990lm	1	4500x500mm

Επιπλέον Επιλογές:

- CCT της επιλογής του Πελάτη απο 4000-6500K
- Βαφή Φωτιστικού σε χρώματα RAL

- Lenses: Metallized polymer
- Diffuser: Clear glass, BK 7

Certificates



GoldLED-Patra



Προτεινόμενες
Χρήσεις:



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
Mid Power LED	4500-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions (α,Ø)
GoldLED Patra 125W	125W	12000lm	1	2500x115mm

Επιπλέον Επιλογές:

- CCT της Επιλογής του Πελάτη απο 4000-6500K
- Βαφή Φωτιστικού σε χρώμα Ασημί ή Λευκό
- Dimmable

- Lenses: Metallized polymer
- Diffuser: High-end transparent and homogeneous light distribution opal
- cover PMMA

Certificates



EN 60598-2-1



GoldLED-Milos



**Προτεινόμενες
Χρήσεις:**



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Mid Power LED	4500-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions (α,Ø)
GoldLED Milos 10W	10W	1200lm	1	1060x168mm
GoldLED Milos 60W	60W	6600lm	1	3000x168mm

Επιπλέον Επιλογές:

- CCT της επιλογής του Πελάτη απο 4000-6500K
- Βαφή Φωτιστικού σε χρώματα RAL
- Dimmable
- Λειτουργία με Timer
- Κέντρικη Ρύθμιση για RGB

- Lenses: Metallized polymer
- Diffuser: Clear glass, BK 7


Certificates



Grass Lunimaires



GoldLED-BriLED IP54

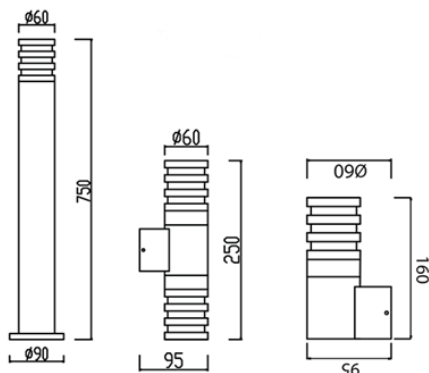

Προτεινόμενες
Χρήσεις:



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
Mid Power LED	4000-5700K	0,90	>80	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	LED Qty	Pcs/Pack	Dimensions (α, Ø)
GoldLED BriLED	2W	18	6	750 x Φ60mm
GoldLED BriLED	2x 2W	2x18	6	250 x Φ60+35mm
GoldLED BriLED	2W	18	6	160 x Φ60+35mm

Mechanical Specifications: Aluminium injection body with chrome coated. Stainless steel connection elements.

Electrical Specifications: High efficiency LED driver. High transmission decorative crystal optical cover

Optical Specifications: High efficiency LED driver. High transmission decorative crystal optical cover.

Certificates



GoldLED-Pigeon IP54



**Προτεινόμενες
Χρήσεις:**



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
Mid Power LED	4000K	0,90	>80	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions (α,Ø)
GoldLED Pigeon	20W	600lm	1	820 x Φ 111mm

Certificates



EN 60598-2-1



GoldLED-Fia IP54



Προτεινόμενες
Χρήσεις:



PARKS



BUILDING SURROUNDINGS

2 Years Warranty

LED Base	CCT Suggested	CRI	Body	Frequency	Lifetime
E27	3000-4000K	>80	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Suggested Lamp	Pcs/Pack	Dimensions (α,Ø)
GoldLED Pigeon	10W	1	750 x Φ100mm


Certificates



Appliques and Recessed LED Lighting



GoldLED-Cono Applique

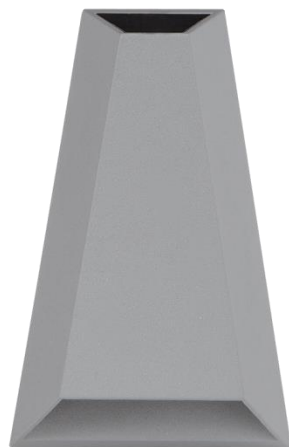

Proposed Options:



SHOPPING CENTERS



STORES



BUILDING SURROUNDINGS



PARKS



HOTELS

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Mid Power LED	4000K	0,95	>80	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,c)
GoldLED Cono 5W	5W	400lm	12	109x173x63mm

Certificates




IP54

EN 60598-2-1



GoldLED-HatLED Applique

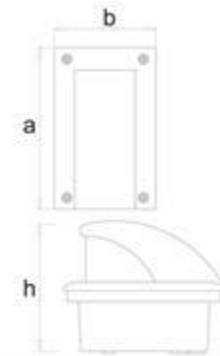

Proposed Options:



SHOPPING CENTERS



STORES



RESTAURANTS AND CAFES



HOTELS



SHOWCASES

LED Type	Color Range	Power Factor	CRI	Body	Frequency
SMD Mid Power LED	4000K	0,95	>80	Electrostatic powder coated metal	50-60Hz

Product	Power	Lumen	Dimmensions(a,b,c)
GoldLED Sirius 8W	2.4W	120lm	166x105x135mm

Certificates



GoldLED-Cubo



Proposed Options:



LED Type	Color Suggested	Color Range
E27 Lamp	3000K-4000K	4000K

Product	Power	Lumen	Pcs/Pack	Dimmensions(a,b,c)
GoldLED Cube 10W	10W	910lm	12	109x173x63mm

Certificates




IP65

EN 60598-2-1



GoldLED-RC01 IP67 Recessed Floor Luminaires



Proposed Options:



SHOPPING CENTERS



STORES



RESTAURANTS AND CAFES



HOTELS



SHOWCASES

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
Power SMD LED	4000-6500K	0,95	>80	Electrostatic powder coated aluminium	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,c)
GoldLED RC01 12W	12W	1152lm	6	200x173x395mm

Επιπλέον Επιλογές:

- CCT της επιλογής του Πελάτη
- Λειτουργία με Timer

Certificates



GoldLED-RC02 Recessed MiniLED



Proposed Options:



SHOPPING CENTERS



STORES



RESTAURANTS AND CAFES



HOTELS



SHOWCASES

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD LED	White or Blue	0,95	>80	Electrostatic powder coated aluminium	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b)
GoldLED RC02 MiniLED 1.5W White Circle	1.5W	130lm	18	165x125mm
GoldLED RC02 MiniLED 1.5W White Rectanlge	1.5W	130lm	18	125x125x165mm

Επιπλέον Επιλογές:

- Sandblasted Glass

Certificates



IP67

EN 60598-2-1



GoldLED-RC03 Recessed MultiLED



Proposed Options:



SHOPPING CENTERS



STORES



RESTAURANTS AND CAFES



HOTELS



SHOWCASES

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
GU10	White	0,95	>80	Electrostatic powder coated aluminium	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b)
GoldLED RC03 MultiLED	1.5W	130lm	18	165x125mm

Certificates



WallWashers and Flood Lights



GoldLED-Inovaled Wallwasher IP66



Proposed Options:



LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Power LED	3000-4000K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions(a,b,c)
GoldLED Inovaled WW 15W*	15W	1455lm	4	342x140x69mm
GoldLED Inovaled WW 30W*	30W	3030lm	4	640x140x69mm
GoldLED Inovaled WW 45W*	45W	4045lm	4	942x140x69mm
GoldLED Double Inovaled WW 30W	30W	2910lm	4	342x140x69mm
GoldLED Double Inovaled WW 60W	60W	5820lm	4	640x140x69mm
GoldLED Double Inovaled WW 90W	90W	8730lm	4	942x140x69mm

Extra Options:

- RAL Color Option
- Dimming through DMX Control
- Beam Angle upon request


Lenses: UV protection , PMMA

Diffuser: PC

Certificates



GoldLED-WWR01 Recessed Wallwasher



Proposed Options:



PARKS



FACADES

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Power LED	3000-4000K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,c)
GoldLED WWR01-60W	60W	5500lm	1	500x80x95mm
GoldLED WWR01-100W	100W	9000lm	1	1000x80x95mm

Extra Options:

- RAL Color Option
- Dimming through DMX Control
- Beam Angle upon request

Lenses: UV Stabilised PMMA

Diffuser: Tempered Glass

Certificates



GoldLED-IF Wallwasher IP67



Proposed Options:



LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
SMD Power LED	3000-6500K	0,95	>90	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimensions(a,b,c)
GoldLED IF 54W	54W	7560lm	4	1000x80x95mm

Extra Options:

- RAL Color Option
- Dimming through DMX Control
- Beam Angle upon request

Lenses: UV protection , PMMA

Diffuser: PC

Certificates



GoldLED-Stadium Floodlight for Courts



Proposed Options:



PARKS



FACADES

LED Type	Color Range	Power Factor	CRI	Body	Frequency	Lifetime
COB	3000-6500K	0,95	>70	Electrostatic powder coated metal	50-60Hz	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions
GoldLED FOS-120W	120W	18.120lm	1	435x325x200mm

Extra Options:

- RAL Color Option
- Dimming through DMX Control
- Beam Angle upon request

5 Years Warranty

Cree LED

Certificates



GoldLED-111 SERIES IP66



Voltage	Color Range	Type LED	CRI	Shining Angle	Warranty	Lifetime
AC85-265V	3000-6500K	SMD	>80	120 Degrees	2 Years	40.000 Ωρες

Product Code	Power	Substitutes	Lumen	Dimensions
GoldLED-111-10W	10W	35W	850	128X120X48mm
GoldLED-111-30W	30W	120W	2550	228X222X53mm

Certificates



GoldLED-111 SERIES IP66 (Continue)



Voltage	Color Range	Type LED	CRI	Shining Angle	Warranty	Lifetime
AC85-265V	3000-6500K	SMD	>80	120 Degrees	2 Years	40.000 Hours

Product Code	Power	Substitutes	Lumen	Dimmensions
GoldLED-111-50W	50W	250W	4.250	288X279X63mm
GoldLED-111-100W	100W	400W	8.500	290X90X340mm
GoldLED-111-150W	150W	600W	12.750	335X95X390mm
GoldLED-111-200W	200W	800W	17.000	335X95X390mm


Certificates



Pool Lighting



GoldLED-Pool Lighting with Base IP68



Proposed Options:




Voltage	Color Range	Power Factor	Frequency	IP	RGB Mode	Material	Lifetime
DC24V	4000K	0,95	50-60Hz	68	Automatic with 24V transformer	Aluminium	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions(a,b,c)
GoldLED Pool RGB-12W	12W	1200lm	6	360x240x150mm

Certificates



GoldLED-Pool Lighting RGB IP68



Proposed Options:




Voltage	Color Range	Power Factor	Frequency	IP	RGB Mode	Material	Lifetime
DC24V	RGB	0,95	50-60Hz	68	Automatic with 24V transformer	Aluminium	50.000 Hours

Product	Power	Lumen	Pcs/Pack	Dimmensions(a,b)
GoldLED Pool RGB-12W	12W	1200lm	12	350x130mm

Certificates



GoldLED-Doris Pool Lighting RGB IP68



Proposed Options:




Type of LED	Voltage	Color Range	Power Factor	Frequency	IP	Material	Lifetime
High Power LED	DC24V	RGB or 6500K	0,95	50-60Hz	68	Polymer injection	50.000 Hours

Product	Power	Lumen	Dimmensions(a,b)
GoldLED Pool Doris-36W	36W	1200lm	228x59mm

Certificates



GoldLED-Doris 2 Pool Lighting RGB IP68



Proposed Options:



Type of LED	Voltage	Color Range	Power Factor	Frequency	IP	Material	Lifetime
High Power LED	DC24V	RGB or 6500K	0,95	50-60Hz	68	Polymer injection	50.000 Hours

Product	Power	Lumen	Dimmensions(a,b)
GoldLED Pool Doris-36W	36W	1200lm	250x50mm

Certificates



[illegible]



Το περιβάλλον είναι
το μέλλον μας.

Προστάτεψε το!

Φρόντισε το όπου
και όπως μπορείς.

Τα παιδιά μας θα
ζήσουν στο
περιβάλλον που θα
τους αφήσουμε...